

5.3GHz Panel 16 dBi Antenna

16 dBi Panel Antenna with 5.3GHz Frequency

This panel antenna delivers extended access point range in a single floor environment ideally positioned in the corner of a building. It functions from point-to-point so that you can wirelessly connect LANs between the buildings in a campus-type environment. It provides multiform transmission when placed on a wall, as the higher powder output extends the range through typical flooring materials





Specification:

Technical Information	
Item No.	PA-5350-16
Frequency.	5250-5350 MHz
Gain.	16 dBi
Polarization.	Vertical
Beamwidth degree.	Horz.15° Vert.15°
(Vertical & Horizontal)	
VSWR.	≦1.5:1
Impedance.	50 Ω
Max Power.	100W
Dimensions	
Size.	L263 x W193 x H42 mm
Weight.	1.1 Kg
Connector.	(N - Type / Female)



VSWR

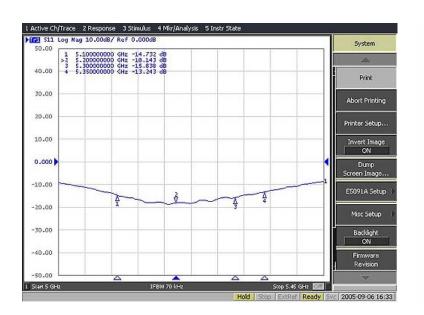

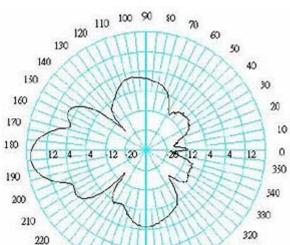

260 270 230

230


210

250

310

300

290

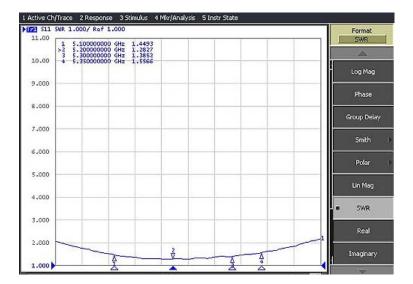

Plane field Patterns